

NEW

# RADIANCE® ULTRA 27"

Premium Endoscopy Visualization



- Optimized for endoscopy applications
- Advanced imaging capabilities
- High brightness and color calibrated
- Cleanable splash-proof design
- 10-year scratch-resistant-glass guarantee
- ZeroWire® embedded receiver optional

The Radiance® Ultra series leads the industry as a revolutionary display with the aim to transform advanced visualization technology capabilities and features into a clinical solution that supports the drive to improve patient outcomes, improve workflow efficiency, and lower operating costs.

Enhanced endoscopic visualization is accomplished with an LED backlight technology that produces the brightest typical luminance level to enable deep abdominal illumination, overcoming glare and reflection in high ambient light environments. Medi-Match™ color calibration assures consistent image quality and accurate color reproduction. The result is outstanding endoscopic video image performance.

With a focus to improve workflow efficiency and workplace safety, the Radiance Ultra series is available with an optional built-in ZeroWire receiver. When paired with the ZeroWire *Mobile* battery-powered stand, the combination becomes the world's first and only truly cordless and wireless mobile endoscopic solution (patent pending). To eliminate display scratches caused by IV poles or surgical light heads, the Radiance Ultra series uses scratch-resistant, splash-proof edge-to-edge glass that includes an industry-exclusive 10-year scratch-resistance guarantee.

# RADIANCE® ULTRA 27"

## Premium Endoscopy Visualization



### SPECIFICATIONS

Screen Size	27" diagonal	
Image Size	24" x 13"/598 x 336 mm (WxH)	
Resolution	1920 x 1080	
Aspect Ratio	16:9	
View Angle	178°	
Luminance	900 cd/m <sup>2</sup> typical @ 6500°K	
Contrast Ratio	1,000:1 (nominal)	
Numbers of Colors	1.07 Billion (10-bit)	
Backlight Stabilization	NDS Intelli-Guard™	
Color Calibration	NDS Medi-Match™	
Color Gamut	BT.709 or SMPTE-C	
Response Time	14ms	
Latency	18ms	
Video Board Configurations	Primary Board – Digital & Analog	DVI-I and 3G-SDI Input/Output (supports VGA/RGB/SoG)
	Secondary Board – Digital	2nd DVI-D and 3G-SDI Inputs/Outputs, Analog Component/VGA
	Secondary Board – Analog	2nd DVI-D Input/Output, Analog Component/VGA, S-Video, Composite
Embedded Wireless Receiver	Optional ZeroWire Embedded Receiver*	
Sealed Glass	Bezel Protected, Edge-to-Edge, Chemically Strengthened	
Glass Anti-Scratch Warranty	10-Year Scratch-Resistant Guarantee	
Warranty	3 Years	
Dimensions (WxHxD)	26.7" x 17.5" x 3.3"/678mm x 445mm x 84 mm (WxHxD)	
Weight	19.5 lbs/8.9 kg (primary board only)	
Shipping Weight**	w/ Secondary Digital Board – 32 lbs/14.5 kg w/ Secondary Analog Board – 31 lbs/14 kg	
Shipping Dimensions	33" x 9" x 22"/84 x 23 x 56 cm	
Green Compliance	REACH, RoHS-2, WEEE	
Regulatory Compliance	ANSI/AAMI ES60601-1, CAN/CSA C22.2 No. 60601-1, Conflict Materials, FCC Class B, EN60601-1, EN60601-1-2, CE, MDD 93/42/EEC, Class I Medical Device, designed to meet IPX6, CCC	
Regulatory Compliance with ZeroWire Embedded	ANSI/AAMI ES60601-1, CAN/CSA C22.2 No. 60601-1, Conflict Materials, FCC Class B, CAN ICES-3(B) / NMB-3(B); EN60601-1, EN60601-1-2, MDD 93/42/EEC, EU Class I Medical Device, US Class II Medical Device, (R&TTE) Directive 1999/5/EC, this device contains module: SII-SK63101, EN 302 065 V1.2.1, CE984Φ, FCC ID: UK2-SII-SK63101, IC ID: 6705A-UK2-SII-SK63101, designed to meet IPX6, 007AA106	
Supplied Accessories	Power Supply, 100-240 VAC, 50-60 Hz to 24 VDC, 2.7 A AC power cord, region appropriate User Manual – English with multi-language CD-ROM	

### Global Headquarters

www.ndssi.com  
5750 Hellyer Ave  
San Jose, CA 95138  
USA 🇺🇸  
+1 408 776 0085  
info@ndssi.com

### Europe

Novanta Europe GmbH  
Münchner Strasse 2A  
82152 Planegg  
Germany EC REP  
+49 89 31 707 100  
info.novanta-europe@novanta.com

### Asia Pacific

Novanta Japan  
East Square Omori  
6-20-14 Minamioi, Shinagawa-ku  
Tokyo 140-0013  
Japan  
+81 3 5753 2466  
info@ndssi.jp

Oriental Media Center  
Suite 2302, Tower C  
No.4, Guang Hua Road  
Chao Yang District  
Beijing, 100026  
China  
+86 10 8559 7859  
info@ndssi.com.cn

### NDS Quality System

ISO 9001:2008 and ISO 13485:2003  
FDA Registration #2954921

### ORDER INFORMATION

#### Radiance Ultra 27"

90R0104	RU 27" with Primary Board
90R0100	RU 27" with Primary and Secondary Digital Board
90R0102	RU 27" with Primary and Secondary Analog Board
90R0109	RU 27" with Primary Board and ZeroWire Embedded Receiver


### OPTIONAL ACCESSORIES

26B0088	Display Stand - 24", 26", 27", 32"
35X0100	Fiber Converter 5 VDC Power Cable

\*Must be installed at factory; not field upgradable.

\*\*Shipping weights are approximate.

### CONFIGURATION

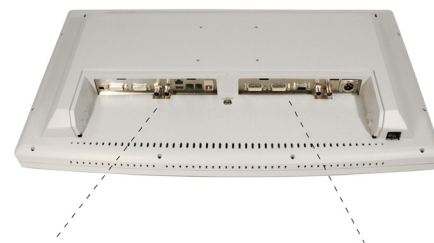

#### Primary Board

90R0104: Primary Board Only

#### Secondary Board\* (optional)

90R0100: Primary + Digital Board  
90R0102: Primary + Analog Board