

RADIANCE® ULTRA 27"

Premium Endoscopy Visualization



- Optimized for endoscopy applications
- Advanced imaging capabilities
- High brightness and color calibrated
- Cleanable splash-proof design
- 10-year scratch-resistant-glass guarantee
- ZeroWire® embedded receiver optional

The Radiance® Ultra series leads the industry as a revolutionary display with the aim to transform advanced visualization technology capabilities and features into a clinical solution that supports the drive to improve patient outcomes, improve workflow efficiency, and lower operating costs.

Enhanced endoscopic visualization is accomplished with an LED backlight technology that produces the brightest typical luminance level to enable deep abdominal illumination, overcoming glare and reflection in high ambient light environments. Medi-Match™ color calibration assures consistent image quality and accurate color reproduction. The result is outstanding endoscopic video image performance.

With a focus to improve workflow efficiency and workplace safety, the Radiance Ultra series is available with an optional built-in ZeroWire receiver. When paired with the ZeroWire *Mobile* battery-powered stand, the combination becomes the world's first and only truly cordless and wireless mobile endoscopic solution (patent pending). To eliminate display scratches caused by IV poles or surgical light heads, the Radiance Ultra series uses scratch-resistant, splash-proof edge-to-edge glass that includes an industry-exclusive 10-year scratch-resistance guarantee.

RADIANCE® ULTRA 27"

Premium Endoscopy Visualization



SPECIFICATIONS

Screen Size	27" diagonal	
Image Size	24" x 13"/598 x 336 mm (WxH)	
Resolution	1920 x 1080	
Aspect Ratio	16:9	
View Angle	178°	
Luminance	900 cd/m ² typical @ 6500°K	
Contrast Ratio	1,000:1 (nominal)	
Numbers of Colors	1.07 Billion (10-bit)	
Backlight Stabilization	NDS Intelli-Guard™	
Color Calibration	NDS Medi-Match™	
Color Gamut	BT.709 or SMPTE-C	
Response Time	14ms	
Latency	18ms	
Video Board Configurations	Primary Board – Digital & Analog	DVI-I and 3G-SDI Input/Output (supports VGA/RGB/SoG)
	Secondary Board – Digital	2nd DVI-D and 3G-SDI Inputs/Outputs, Analog Component/VGA
	Secondary Board – Analog	2nd DVI-D Input/Output, Analog Component/VGA, S-Video, Composite
	Secondary Board – HDBaseT	2x HDBaseT Inputs (DVI over CAT-6)
Embedded Wireless Receiver	Optional ZeroWire Embedded Receiver*	
Sealed Glass	Bezel Protected, Edge-to-Edge, Chemically Strengthened	
Glass Anti-Scratch Warranty	10-Year Scratch-Resistant Guarantee	
Warranty	3 Years	
Dimensions (WxHxD)	26.7" x 17.5" x 3.3"/678mm x 445mm x 84 mm (WxHxD)	
Weight	19.5 lbs/8.9 kg (primary board only)	
Shipping Weight**	w/ Secondary Digital Board – 32 lbs/14.5 kg w/ Secondary Analog Board – 31 lbs/14 kg	
Shipping Dimensions	33" x 9" x 22"/84 x 23 x 56 cm	
Green Compliance	REACH, RoHS-2, WEEE	
Regulatory Compliance	ANSI/AAMI ES60601-1, CAN/CSA C22.2 No. 60601-1, Conflict Materials, FCC Class B, EN60601-1, EN60601-1-2, CE, MDD 93/42/EEC, Class I Medical Device, designed to meet IPX6, CCC	
Regulatory Compliance with ZeroWire Embedded	ANSI/AAMI ES60601-1, CAN/CSA C22.2 No. 60601-1, FCC Class B, CAN ICES-3(B) / NMB-3(B); EN60601-1, EN60601-1-2, MDD 93/42/EEC, EU Class I Medical Device, US Class II Medical Device, (RE-D) Directive 2014/53/EU, this device contains module: SII-SK63101, EN 302-567 V2.0.24, CE, FCC ID: UK2-SII-SK63101, IC ID: 6705A-UK2-SII-SK63101, designed to meet IPX6, 007AA106, FDA cleared	
Supplied Accessories	Power Supply, 100-240 VAC, 50-60 Hz to 24 VDC, 6.25 A AC power cord, region appropriate	

Global Headquarters

www.ndssi.com
5750 Hellyer Ave
San Jose, CA 95138
USA 🇺🇸
+1 408 776 0085
info@ndssi.com

Europe

Novanta Europe GmbH
Parking 57-59
85748 Garching
Germany 🇩🇪
+49 89 31 707 100
info.novanta-europe@novanta.com

Asia Pacific

Novanta Japan
East Square Omori
6-20-14 Minamioi, Shinagawa-ku
Tokyo 140-0013
Japan
+81 3 5753 2466
info@ndssi.com

Oriental Media Center
Suite 2302, Tower C
No.4, Guang Hua Road
Chao Yang District
Beijing, 100026
China
+86 10 8559 7859
info@ndssi.com

NDS Quality System

ISO 13485
FDA Registration #2954921

ORDER INFORMATION

Radiance Ultra 27"

90R0104	RU 27" with Primary Board
90R0100	RU 27" with Primary and Secondary Digital Board
90R0102	RU 27" with Primary and Secondary Analog Board
90R0109	RU 27" with Primary Board and ZeroWire Embedded Receiver
90R0126	RU TC 32" with Primary and Secondary HDBaseT Board


OPTIONAL ACCESSORIES

90Z0221	Fiber Converter 5 VDC Power Cable
---------	-----------------------------------

*Must be installed at factory; not field upgradable.

**Shipping weights are approximate.

CONFIGURATION

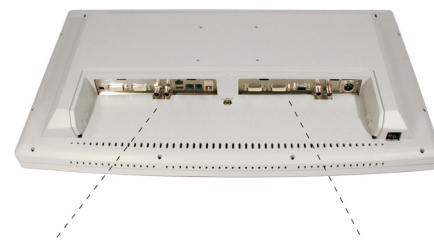

Primary Board

90R0104: Primary Board Only

Secondary Board* (optional)

90R0100: Primary + Digital Board
90R0102: Primary + Analog Board
90R0126: HDBaseT Board